

Wedge anchor DBZ



Base materials


- Concrete (cracked)
- Concrete (uncracked)

Applications

- Suspensions from concrete ceilings with slit-steel straps, punched band, nonius system hangers or wood battens
- For redundant applications in cracked concrete or single-point applications in uncracked concrete

Advantages

- Simple and fast through-fastening
- Impact expansion by hammering in, no setting tool is needed
- Reliable setting thanks to the simple visual check

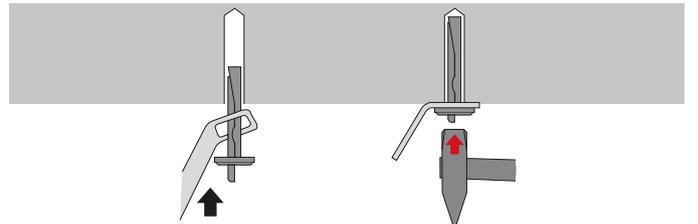

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

Technical data

Material composition	Steel, zinc-plated (min. 5 µm)
Head configuration	Flat head
Suitable for cracked concrete with redundant fastenings	Yes
Anchor length	40 mm
Anchor size	6 mm
Base plate clearance hole	7 mm

Ordering designation	Drill bit diameter	Sales pack quantity	Item number
DBZ 6/4.5	6 mm	100 pc	256312 ¹⁾

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.