

**Drop-in (flush) anchor (imperial) HKD**



**Base materials**

- Concrete (uncracked)

**Applications**


- For medium-duty loads with anchor bolts and threaded rods, e.g. suspension systems for pipes, air ducts and sprinkler systems etc.

**Advantages**

- Collar ensures precise setting flush with the surface irrespective of hole depth - ideal for repetitive fastening using threaded rods of the same length
- No damage to the thread when tapping in and expanding “Intelligent” stepped expansion piece adapts to suit materials of different hardness

**Technical data**

<b>Head configuration</b>	Inner thread
<b>Material composition</b>	Steel, zinc-plated (min. 5 µm)
<b>PROFIS</b>	Yes

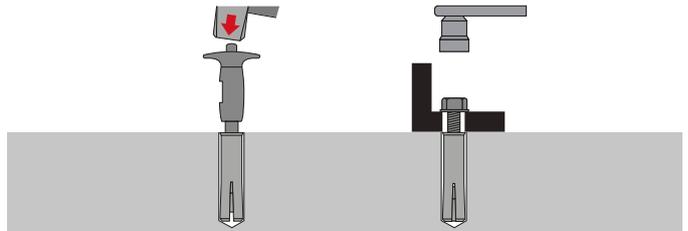

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to [www.hilti.com/techlib](http://www.hilti.com/techlib).

Ordering designation	Drill bit diameter	Drilling depth	Internal thread size	Useable thread length	Max. tightening torque	Packaging	Anchor length	Sales pack quantity	Item number
<b>HKD 1/4"x25</b>	8 mm	27 mm	6 mm	13 mm	3 Nm	Box	25 mm	100 pc	<b>382980</b>
<b>HKD 5/16"x30</b>	10 mm	33 mm	8 mm	15 mm	7 Nm	Box	30 mm	100 pc	<b>383679</b>
<b>HKD 3/8"x30</b>	12 mm	33 mm	10 mm	14 mm	15 Nm	Box	30 mm	100 pc	<b>383686</b>
<b>HKD 3/8"x40</b>	12 mm	44 mm	10 mm	19 mm	15 Nm	Box	40 mm	100 pc	<b>383960</b>
<b>HKD 1/2"x50</b>	16 mm	55 mm	13 mm	23 mm	30 Nm	Box	50 mm	50 pc	<b>384021</b>
<b>HKD 5/8"x65</b>	20 mm	70 mm	16 mm	32 mm	60 Nm	Box	65 mm	25 pc	<b>384023<sup>1)</sup></b>

<sup>1)</sup> This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.