

Frame anchor with countersunk head HRD-CR



Base materials

- Concrete (aerated)
- Concrete (cracked)
- Concrete (hollow deck)
- Concrete (uncracked)
- Masonry (grout-filled CMU)
- Masonry (hollow)
- Masonry (hollow CMU)
- Masonry (solid)

Applications

- Typical applications for metal fabricators such as fastening handrails, window bars, railings, balustrades, etc.
- Fastening wooden substructures for ventilated facades
- Fastening door and window frames

Advantages

- Flexible embedment depth (approved at 50 mm and 70 mm embedment depth) - the ideal anchor for a huge range of applications in virtually all base materials
- Available in 3 different materials for optimum suitability in all corrosive environments
- Pre-assembled for optimum handling and fastening quality

Technical data

Material composition	Steel, A4 (SS 316) or duplex equivalent, Polyamide
Head configuration	Countersunk
Anchor size	10 mm
Suitable for cracked concrete with redundant fastenings	Yes

Ordering designation	Drill bit diameter	Anchor length	Embedment depth 1	Fastening thickness at embed.1	Bit size	Screw head diameter	Sales pack quantity	Item number
HRD-CR 10x60	10 mm	60 mm	50 mm	10 mm	T40	14 mm	50 pc	423885 ¹⁾


¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.

Approvals

ETA | ETA-07/0219 for HRD (ETAG 020-01, Option -)

Approvals and test reports may apply to selected products only. Please refer to the documents for details.

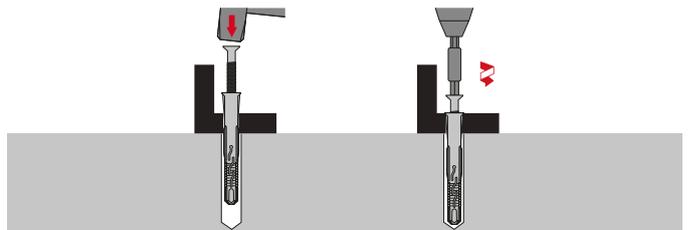

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.