

Standard stud anchor HSV-BW



Base materials

- Concrete (uncracked)

Applications


- Wide range of applications in uncracked concrete

Advantages

- Two embedment depths
- Setting mark for easy checking of correct installation
- Raised impact section prevents thread damage during installation

Technical data

Material composition	Steel, zinc-plated (min. 5 µm)
Head configuration	Externally threaded

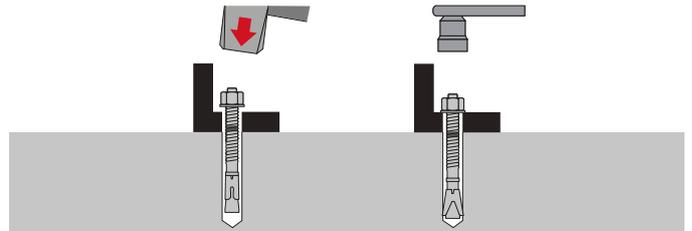

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

Ordering designation	Drill bit diameter	Anchor size	Anchor length	Base plate clearance hole	Required tightening torque	Socket size	Wrench size	Sales pack quantity	Item number
HSV-BW M8x75	8 mm	M8	75 mm	9 mm	15 Nm	13 mm	13 mm	100 pc	2041256 ¹⁾
HSV-BW M10x90	10 mm	M10	90 mm	12 mm	30 Nm	17 mm	17 mm	50 pc	2041257 ¹⁾
HSV-BW M12x100	12 mm	M12	100 mm	14 mm	50 Nm	19 mm	19 mm	25 pc	2041258 ¹⁾
HSV-BW M12x110	12 mm	M12	110 mm	14 mm	50 Nm	19 mm	19 mm	25 pc	2041259 ¹⁾
HSV-BW M12x120	12 mm	M12	120 mm	14 mm	50 Nm	19 mm	19 mm	25 pc	2041600 ¹⁾
HSV-BW M12x150	12 mm	M12	150 mm	14 mm	50 Nm	19 mm	19 mm	20 pc	2041601 ¹⁾
HSV-BW M16x120	16 mm	M16	120 mm	18 mm	100 Nm	24 mm	24 mm	10 pc	2041602 ¹⁾
HSV-BW M16x140	16 mm	M16	140 mm	18 mm	100 Nm	24 mm	24 mm	10 pc	2041603 ¹⁾

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.