

Screw anchor HUS-HR



Base materials

- Concrete (aerated)
- Concrete (cracked)
- Concrete (uncracked)
- Masonry (solid)

Applications

- Tunnel construction
- Anchoring facade panels
- Installing railings

Advantages

- Hexagonal head with integral washer for neat appearance when fastening through in-place parts
- ETA approval - also for use in cracked concrete
- Seismic approval ETA C1


Technical data

Material composition	Steel, A4 (SS316)
Head configuration	Hex head
PROFIS	Yes

Approvals

ETA	ETA-08/0307 for HUS-H & HUS-HR (ETAG 001-3, Option 1)
Fire resistance	ETA-10/0005 for HUS-A, H, I, P, HR (ETAG 001-06, Option -)

Approvals and test reports may apply to selected products only. Please refer to the documents for details.

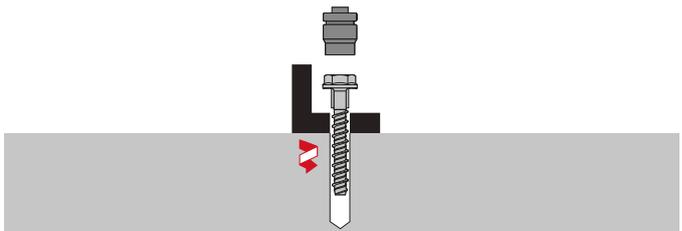

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

Ordering designation	Drill bit diameter	Anchor size	Anchor length	Base plate clearance hole	Wrench size	Sales pack quantity	Item number
HUS-HR 8x65/5/15	8 mm	8	65 mm	12 mm	13 mm	25 pc	290030
HUS-HR 10x65/5	10 mm	10	65 mm	14 mm	15 mm	25 pc	290062¹⁾

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.