
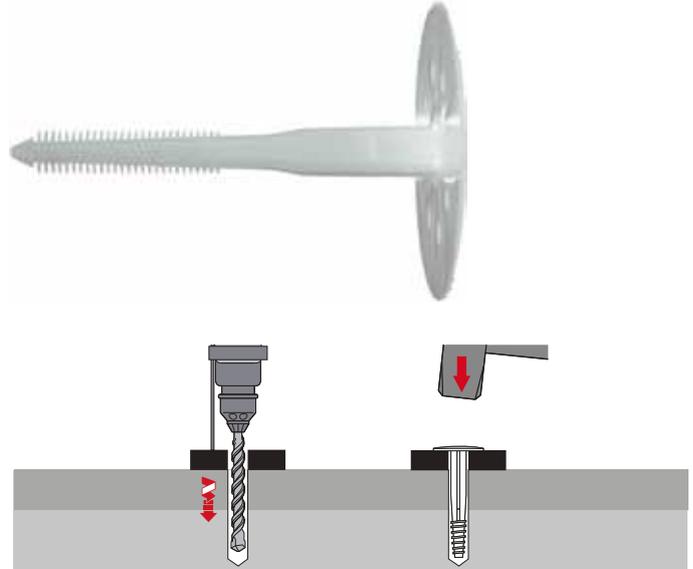


**Insulation anchor IDP**

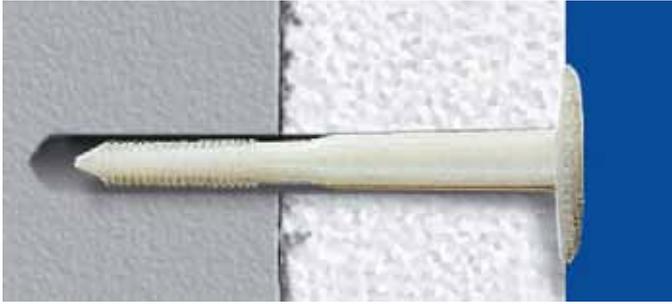

**Base materials**

- Concrete (uncracked)
- Masonry (hollow)
- Masonry (solid)

**Applications**

- Fastening hard, self-supporting, insulating materials such as expanded polystyrene

**Advantages**

- Quick and easy impact installation
- No metal parts, which reduces potential condensation behind finished coat of EIF systems
- Specially structured head to help ensure bonding of plaster applied directly over the anchor

**Technical data**

<b>Material composition</b>	Polypropylene
<b>ETICS</b>	No
<b>Colour</b>	White
<b>Drill bit diameter</b>	8 mm

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to [www.hilti.com/techlib](http://www.hilti.com/techlib).

Ordering designation	Standard embedment depth	Insulation material thickness fastened - min.	Insulation material thickness fastened - max.	Sales pack quantity	Item number
<b>IDP 0/2</b>	25 mm	0 mm	20 mm	250 pc	<b>332105<sup>1)</sup></b>
<b>IDP 2/4</b>	25 mm	20 mm	40 mm	250 pc	<b>332106<sup>1)</sup></b>
<b>IDP 4/6</b>	25 mm	40 mm	60 mm	250 pc	<b>332107<sup>1)</sup></b>
<b>IDP 6/8</b>	25 mm	60 mm	80 mm	250 pc	<b>332108<sup>1)</sup></b>

<sup>1)</sup> This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.