

Flexible firestop sealant CP 606




Applications

- Sealing rigid or low-movement ceiling/wall joints, widths from 6 to 30 mm
- Sealing cable tray penetrations
- Sealing metal pipe penetrations
- For use in various base materials such as masonry, concrete, drywall and metal
- Not for use on areas immersed in water or outdoors

Advantages

- Paintable
- Good adherence without primer
- Easy clean up with water
- Smoke, fume and water resistant
Tested for 500 cycles with up to 33% movement in accordance with UL 2079 and ASTM E1966
- Meets LEED™ requirements for indoor environmental quality credit 4.1 Low Emitting Materials, Sealants and Adhesives and 4.2 Paints and Coatings

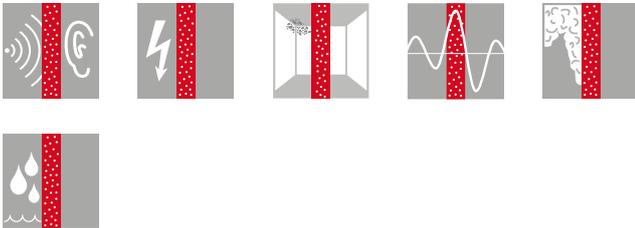

Technical data	
Chemical basis	Water-based acrylic dispersion
Base materials	Concrete, Masonry, Drywall, Steel
Tested in accordance with	UL 2079, ASTM E814, ASTM E1966, UL 1479, CAN/ULC-S115, ETA
Movement¹⁾	±12.5% (ISO 11600)
Acoustics performance	Test report available
LEED VOC	75 g/l
Can be painted	Yes
Approx. curing time²⁾	3 mm/3 days
Intumescent	No
Application temperature range	5 - 40 °C

¹⁾ according to HTC 1250

²⁾ at 75°F/24°C, 50% relative humidity



Ordering designation	Volume per unit	Content per can/cartridge	Sales pack quantity	Item number
CP 606 310ml white	310 ml	310 ml	1 pc	209625
CP 606 310ml INT grey	310 ml	310 ml	1 pc	209630
CP 606 580ml white	580 ml	580 ml	1 pc	209632 ¹⁾
CP 606 580ml INT grey	580 ml	580 ml	1 pc	209633 ¹⁾

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.